


26 446 LS0 RAINSHOWER SYSTEM SMARTCONTROL MONO 360 COMBI SHOWER SYSTEM WITH THERMOSTAT, EXPOSED/CONCEALED

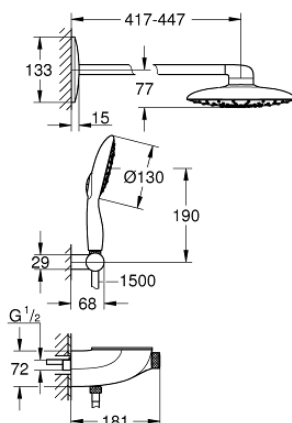

PRODUCT DESCRIPTION

- Colour: moon white/chrome
- consists of:
 - exposed/concealed SmartControl thermostat
 - allows change between:
 - head shower Rainshower Mono 360 with horizontal 450 mm shower arm, spray plate white
 - spray pattern: GROHE PureRain/GROHE Rain O² spray*
 - maximum flow rate (at 3 bar): 20 l/min
 - Power&Soul 130 hand shower, spray plate white (27 673)
 - maximum flow rate (at 3 bar): 9.5 l/min
 - hand shower wall holder (27 055)
 - Silverflex shower hose 1.500 mm (28 364)
 - minimum flow rate 10 l/min.
 - GROHE DreamSpray - perfect spray pattern
 - GROHE LongLife finish
 - GROHE CoolTouch - no risk of scalding
 - GROHE TurboStat - compact cartridge with wax thermoelement
 - GROHE EcoJoy - less water, perfect flow
 - GROHE SafeStop - safety button at 38°C
 - GROHE SafeStop Plus - optional temperature limiter at 43°C included
 - GROHE SmartControl - control the shower with intuitive push/turn button
 - GROHE EasyReach shower tray
 - GROHE SpeedClean - effortless limescale removal
 - Inner WaterGuide - inner insulation for surface protection
 - TwistStop - to prevent hose from twisting
- requires rough-in set 26 264 and concealed unit 26 449 – all to be ordered separately
- * to be decided at first installation; factory default setting: GROHE PureRain