



29 120 000 GROHTHERM SMARTCONTROL THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES AND INTEGRATED SHOWER HOLDER

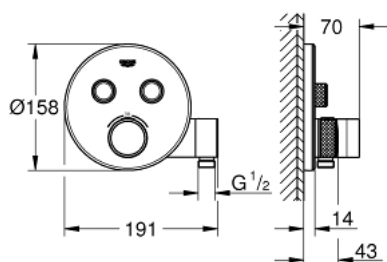

PRODUCT DESCRIPTION

- Colour: chrome
- final installation set for
- GROHE Rapido SmartBox (35 600/35 604)
- metal wall escutcheon with GROHE FastFixation (covered escutcheon and shaft sealing, covered fixing), retroactively 6° adjustable
- GROHE Long-Life finish
- GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow
- exchangeable symbols
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE ProGrip with knurl structure
- GROHE SafeStop at 38°C
- GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
- built-in non-return valves and dirt strainers
- multiple outlets can be run simultaneously
- integrated shower union with shower outlet 1/2"
- without floor installation plate
- flow performance: outlet B = 24 l/min hand shower = 12 l/min outlet B + hand shower = 27 l/min

29 120 000 GROHTHERM SMARTCONTROL THERMOSTAT FOR CONCEALED INSTALLATION WITH 2 VALVES AND INTEGRATED SHOWER HOLDER

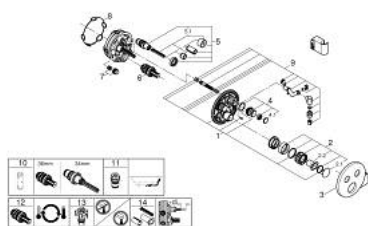

SPARE PARTS, January 2023 – now

- 1: Mounting Template (Order-nr. 48364000)
 - 2: Temperature control handle (Order-nr. 49029000)
 - 2.1: Cap (Order-nr. 1015030000)
 - 2.2: handle adaptor (Order-nr. 1015059990)
 - 3: Escutcheon (Order-nr. 49034000)
 - 4: Push button (Order-nr. 48361000)
 - 4.1: pushbutton (Order-nr. 14077000)
 - 5: Cartridge (Order-nr. 48359000)
 - 5.1: Spindle (Order-nr. 49088000)
 - 6: Thermostatic compact cartridge 3/4" (Order-nr. 49028000)
 - 7: Non-return valves (Order-nr. 47979000)
 - 8: Ball seal dia. 9x6.8 mm (Order-nr. 48360000)
 - 9: Race (Order-nr. 1015049990)
 - 10: Socket spanner (Order-nr. 49059000)*
 - 11: Backflow protection combination (EN1717) (Order-nr. 14055000)*
 - 12: GROHE TurboStat cartridge 3/4" (Order-nr. 49003000)*
 - 13: Service stops (Order-nr. 1405300M)*
 - 14: Universal extension set single-lever mixers, 25 mm (Order-nr. 14048000)*
- * Optional accessories